


Installation Manual


The Merus Ring is installed on the main water pipe.




Parts needed for installation:

- ✓ some insulating tape
- ✓ a 5 mm Allen key


Please keep a minimum distance of 50 cm from any electrical devices.

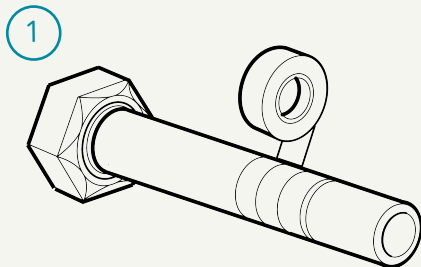


Wrap the **insulating tape** around the water pipe, where the Merus Ring should be installed.

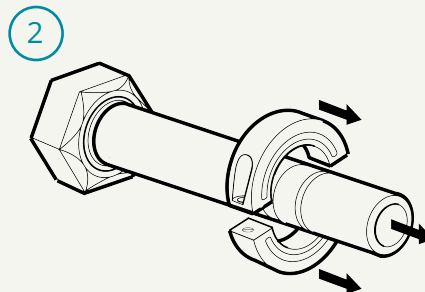

Unscrew the two halves of the ring. The **blue inlay** and the **arrow** next to the serial number should point in the **direction of flow**.

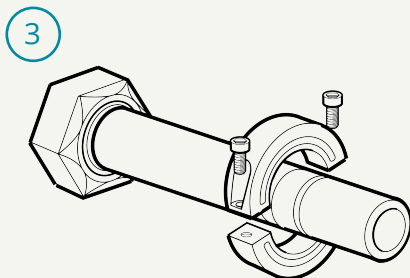

Close the two halves of the ring completely. The Merus Ring may be slightly larger than the pipe. However, it must be screwed together without leaving a gap at both ends.

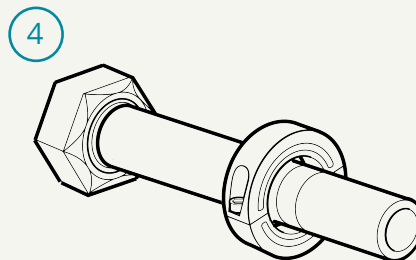

If the distance between the pipe and the Merus Ring is clearly too large, the gap can be filled with paper or foam. This does not influence the effect.



<50V/m



Avoid strong
magnetic fields



Do not use
under water



Avoid splashing
water



5°C-95°C